

TECHNICAL DATA



DUO-EC V





DUO-EC

Is a Non Residential Ventilation Unit (NRVU)

EQUIPPED

Equipped with medium efficiency counterflow heat exchanger (Eurovent certified) and EC fans with backward curved blades. Series partial bypass allows you to exploit favorable outside conditions for the building for free cooling (or free heating).

STRUCTURE

The DUO-EC is made of extruded aluminium profiles and double skin magnesium zinc panels, sandwiched on injected polyurethane foam insulation, thickness 25 mm and density 42 Kg/m³. The position of the ducting connections, made with circular spigots, are easily configurable simply by moving the ducting connection panels. 3 sizes are available in horizontal configuration, floor installation, all equipped with automatic partial bypass and medium efficiency heat exchanger. Post heating devices (electric or water), post cooling/heating water coil, direct expansion coil and electrical pre heater device are integrated into the unit are available as additional external module. The filtering sections are: ePM1 55% (F7) filters for the fresh air flow and ePM10 50% (M5) filters for the extraction air flow.

CONTROLS

The DUO-EC is supplied with control system and easy connection to the power supply. It's also available the versions with simplified CTR08-PH control, the version with EVO-PH control and the version with EVOD-PH-IP control ready for integration in home automation systems (Modbus protocol with Ethernet connection or, upon request, with the addition of the RS485 connection). The new version of our control systems allows the user to shift from one control system to another very quickly and easily by replacing the remote panel even after the installation. It is available the version without control.

The CTR08-PH control allows the user to select three levels of fan speed or the possibility to stop them. It automatically manages the By-pass and prevents the heat exchanger freezing by programming the fan speed or, if specifically required, the electric pre-heater resistance (optional item to install inside the unit). The control advises the user if filters needs to be replaced (the filter clogging is monitored by a pair of differential pressure sensors) or any other fault. The EVO-PH control has a colored backlit touch screen interface, it gives an intuitive operating status of the unit and it allows programming the fan speed. This control has a weekly time schedule for automatic unit control, it can be controlled by an external switch to activate the booster and it can automatically adjust the air flow when connected to an air quality sensor.

It supports post-air treatment accessories and it advises the user if filters needs to be replaced (the filter clogging is monitored by a pair of differential pressure sensors) or if there is any other fault showing where it comes from.

The EVOD-PH-IP control has the same characteristics of the EVO-PH version with the addition of the Modbus communication protocol and it allows full control of the unit by the Home Automation software system. If the unit is in a Home Automation network, the webserver lets the user interact with it throughout a device connected to an Internet browser. On request it's also available the version without control system and without electrical cabinet (adjustable pressure switches for filter status and bypass actuator are installed)

NOTE: for the recuperators provided in the "plug & play" version with our CTR08-PH or EVO-PH control, the management of by-pass is automatic, with by-pass motor and temperature probes supplied and installed on board the machine.

CONTROL CTR-EASY (X539-U0.1)

- . OFF, ON speed 1, speed 2, speed 3 if with CTR08-PH
- . OFF, ON with modulating percentage if with EVO-PH
- . ON /OFF by-pass
- . 3 temperature inputs
- . filters alarms (hour counter / pressure switches on digital input dedicated)

IMPORTANT

- . The units put on the market from 1 January 2018 must be with pressure switches (ErP-2018)
- . The by-pass can not be managed automatically: to do this provide temperature probes mounted in the unit and the control display CTR08-PH or EVO-PH with 3 temperature probes
- . for remote management of the recuperator, add the CTR08-PH control display (2 indicators: service and filters) or EVO-PH (particular status vision of the unit and any alarms detail)


ACCESSORIES

DUO-EC can be equipped with other accessories such as:


- . R.H. of probe, CO₂ or CO₂ / VOC
- . protection roof for outside installazione
- . switch speed

For a more complete view of the characteristics of the control panels, please read the specific manuals.

DUO-EC V – SIDE VIEW STANDARD Configuration

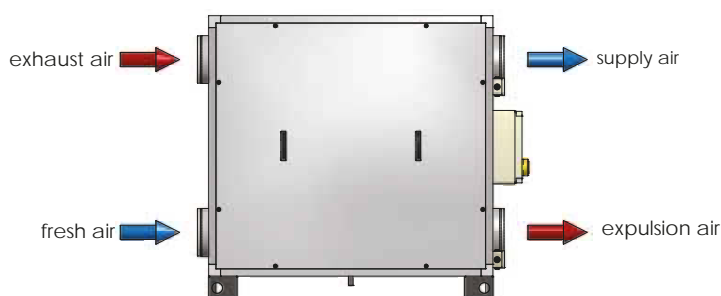

DUO-EC V – SIDE VIEW STANDARD Configuration

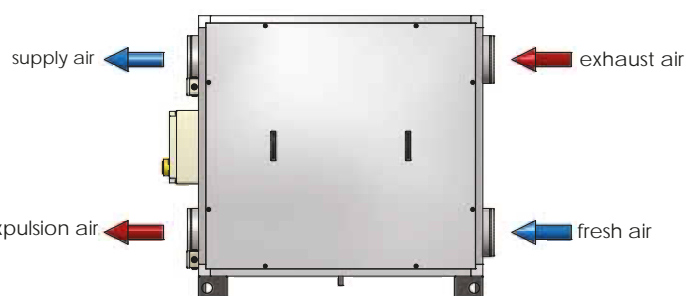


Counterflow heat exchanger made of aluminum manufactured by RECUTECH
RECUTECH participates in the Eurovent Certification Program




PERFORMANCE (UNI EN 13141-7)

The unit must be ducted properly: UTEK authorizes the use only according to its performance diagram shown into this catalogue
The declared performances are with CLEAN filters, and guaranteed ONLY with the original filters UTEK low pressure drop.

DUO-EC 1

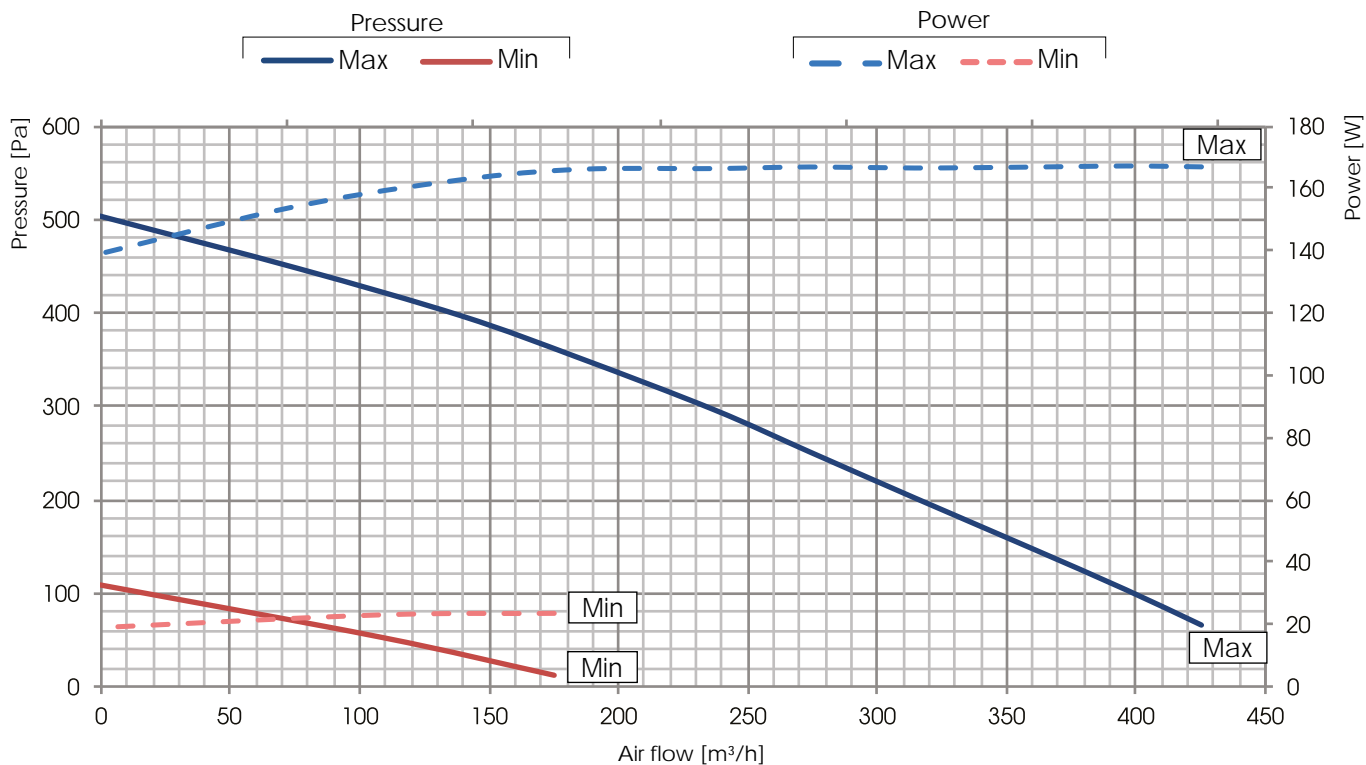

DUO-EC 2

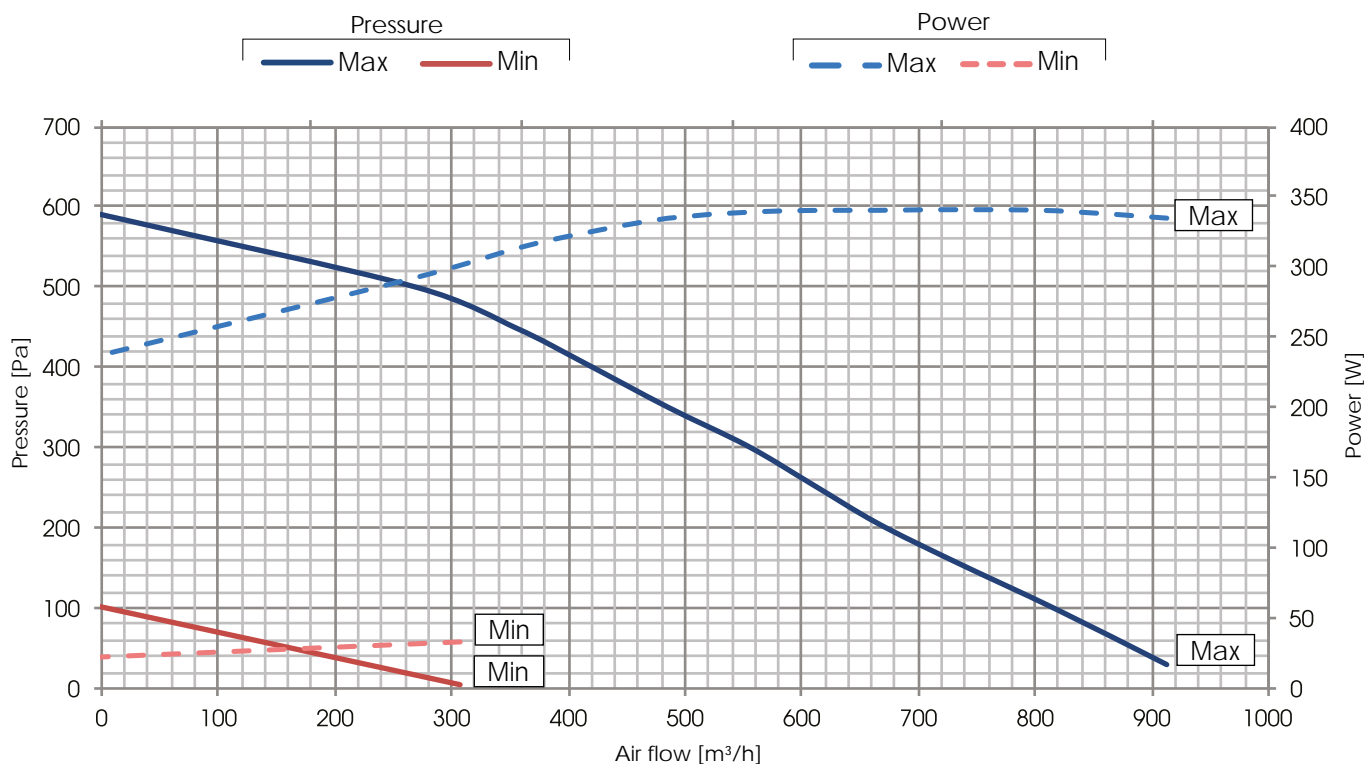




PERFORMANCE (UNI EN 13141-7)


The unit must be ducted properly: UTEK authorizes the use only according to its performance diagram shown into this catalogue
The declared performances are with CLEAN filters, and guaranteed ONLY with the original filters UTEK low pressure drop.

DUO-EC 3

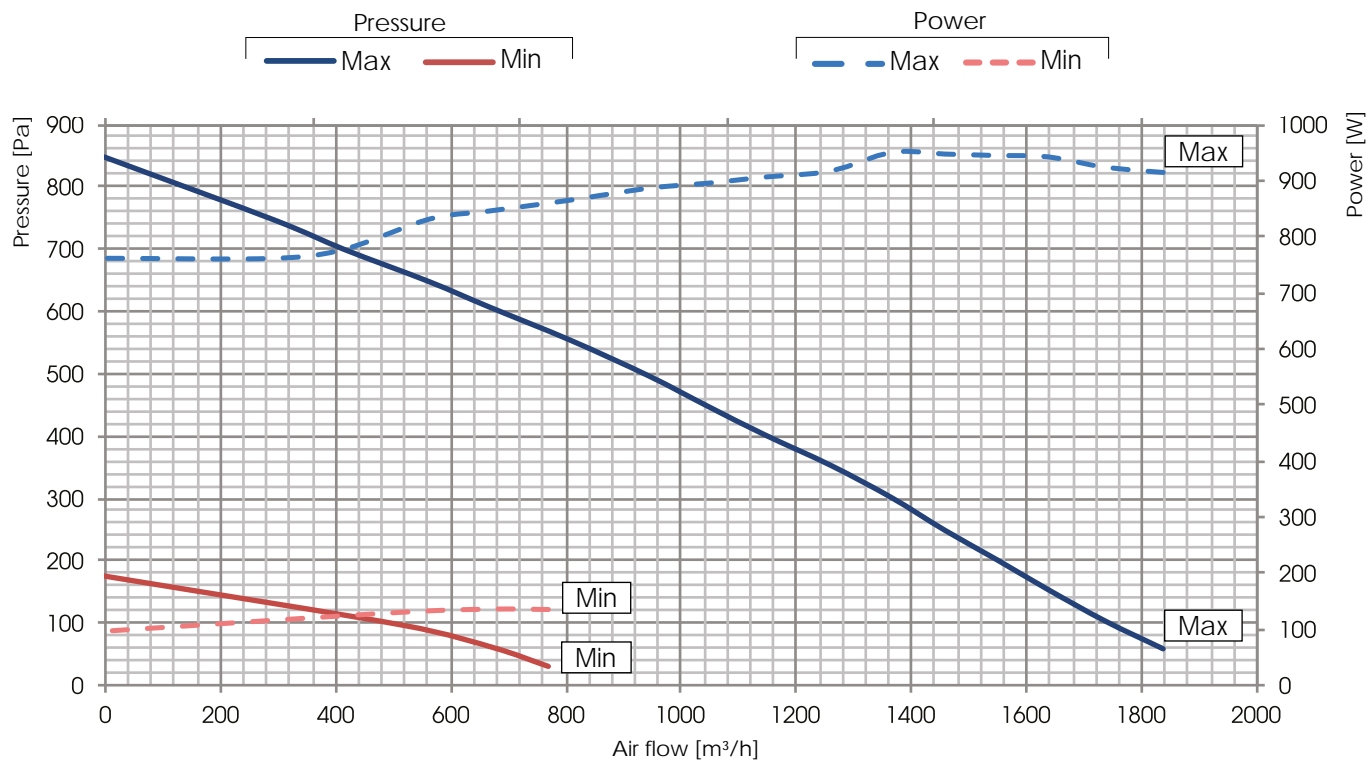

HEAT RECOVERY PERFORMANCE (sensible efficiency)

Values referred to the following conditions (UNI EN 308:1998): T_{bs} external air 5°C; U.R. external 72%; T_{bs} environment 25°C; U. R. environment 38%

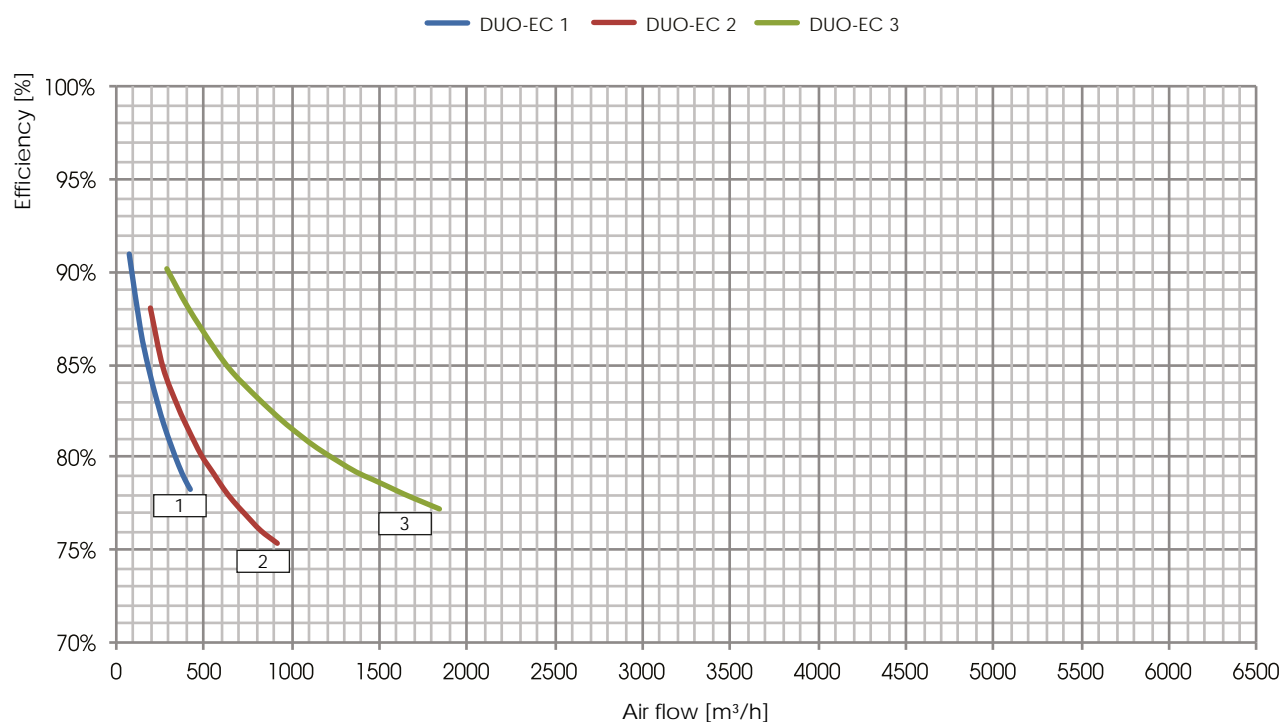



ECODESIGN

MOD.	$\eta_{t,nvr}$ [%]	Q_{nom} [m³/s]	$\Delta p_{s,ext}$ [Pa]	P [kW]	SFP _{int} [W/(m³/s)]	SFP _{int,lim} 2016 [W/(m³/s)]	SFP _{int,lim} 2018 [W/(m³/s)]	FRONTAL VELOCITY [m/s]	$\Delta p_{s,int}$ [Pa]	η_{Fan} [%]	LEAKAGE internal *[%]	LEAKAGE external *[%]
DUO-EC 1	78,8	0,11	100	0,17	836	1537	1257	1,30	419	50,4	6,5	8,5
DUO-EC 2	76,0	0,23	100	0,34	912	1437	1157	1,50	571	63,4	1,5	4,4
DUO-EC 3	79,8	0,35	350	0,92	1206	1530	1250	1,41	734	64,6	5,3	3,8

* Percentage of the nominal flow

VALUES ACCORDING UNI EN 1886: 2008

MOD.	CASING STRENGTH	CASING LEAKAGE	FILTER CLASS	THERMAL TRANSMITTANCE	THERMAL BRIDGE
DUO-EC 1	D1 (M)	L3 (M)	F7 (M)	T4 (M)	TB4 (M)
DUO-EC 2	D1 (M)	L3 (M)	F7 (M)	T4 (M)	TB4 (M)
DUO-EC 3	D1 (M)	L3 (M)	F7 (M)	T4 (M)	TB4 (M)

TEST LEAKAGE (UNI EN 13141-7)

LEAKAGE	TEST CONDITIONS	DUO-EC 1	DUO-EC 2	DUO-EC 3
ESTERNO	Positive pressure 400 Pa	A3	A2	A2
ESTERNO	Negative pressure 400 Pa	A3	A2	A2
INTERNO	Pressure difference 250 Pa	A3	A1	A2

NOISE LEVEL

L_w Sound power level taken in accordance to UNI EN ISO 3747 - CLASS 3

	NOISE FROM THE CASE (dB)							
	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000 Hz	L _w dB(A)
DUO-EC 1	60,0	64,6	60,7	53,9	46,4	41,3	43,9	61,2
DUO-EC 2	65,0	67,2	61,4	58,3	48,6	43,3	45,8	63,6
DUO-EC 3	70,1	75,5	67,4	57,1	50,6	45,1	43,8	69,3
	NOISE IN THE SUPPLY AIR DUCTS (dB)							
	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000 Hz	L _w dB(A)
DUO-EC 1	65,1	69,4	67,9	58,2	59,8	56,8	64,9	69,6
DUO-EC 2	66,2	75,0	68,7	62,6	63,9	58,4	67,3	72,6
DUO-EC 3	74,2	85,1	79,7	73,3	71,2	65,4	70,8	81,5

ELECTRICAL DATA



MATCHING	FANS				UNIT DUO-EC		
	Power [W]	Supply	Current max.[A]	Insulation class	Supply	Current max.[A]	Insulation class
DUO-EC 1	2 x 83	230V 50 Hz 1F	2 x 0,8	IP54 class B	230V 50 Hz 1F	1,5	IP20
DUO-EC 2	2 x 170	230V 50 Hz 1F	2 x 1,4	IP54 class B	230V 50 Hz 1F	2,9	IP20
DUO-EC 3	2 x 448	230V 50 Hz 1F	2 x 2,8	IP54 class B	230V 50 Hz 1F	5,7	IP20

COILS DIMENSIONS

BA-AF	Dimensions [mm]						
	A	B	C	A1	B1	C1	Sporgenza, esclusi tubi
DUO-EC V 1	1200	370	1100	400	480	370	110
DUO-EC V 2	1350	430	1200	400	560	430	130
DUO-EC V 3	1620	550	1460	400	690	550	140

BATTERIA DX	Dimensions [mm]									
	A	B	C	D	G	H	Ø	F	Weight [Kg]	
DUO-EC V 1	480	370	400	200	185	240	1/2"	3/8"	23,0	
DUO-EC V 2	560	430	400	250	215	280	1"	3/8"	28,0	
DUO-EC V 3	690	550	400	315	275	345	1"	3/8"	41,0	


Ø = water connections
F = condensate drain






DUO-EC V 1/2/3

DIMENSIONS (mm) WEIGHT (kg)

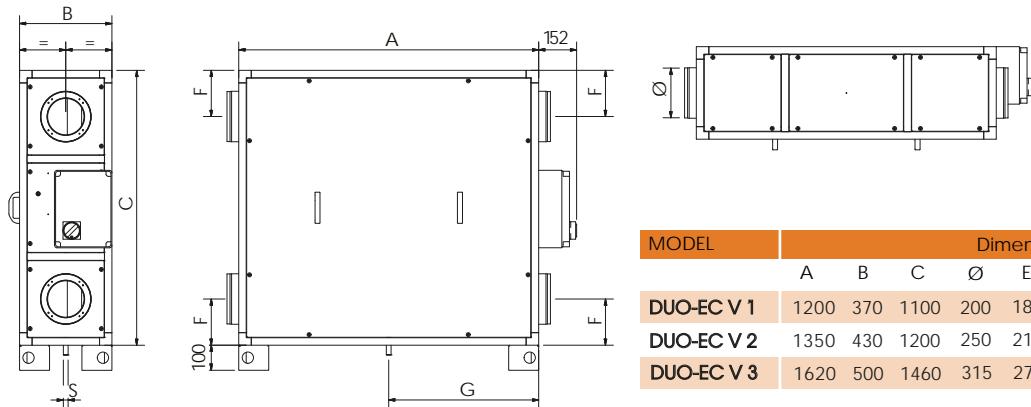


FLOOR INSTALLATION DUO-EC V from size 1 to 3

Minimum required space for standard maintenance (mm)

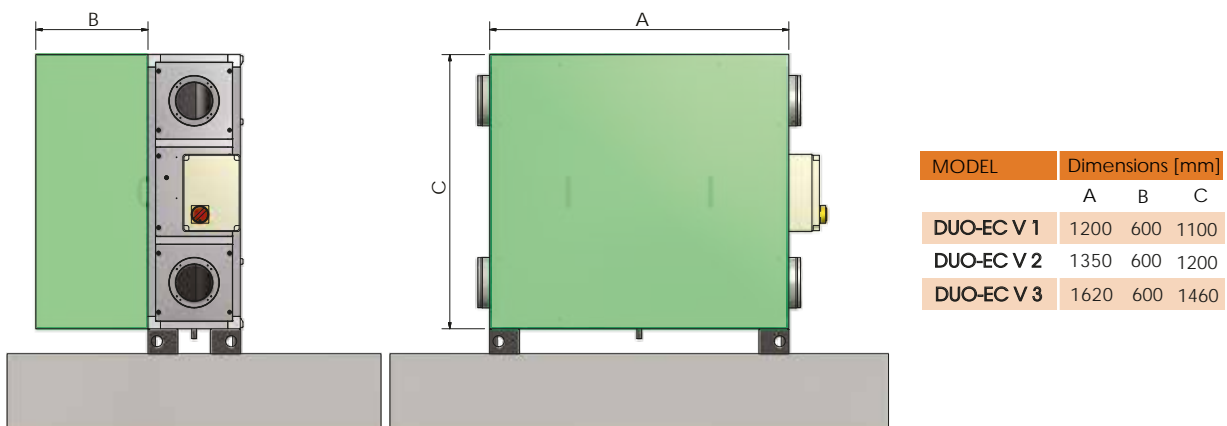


STANDARD SIPHON [mm]

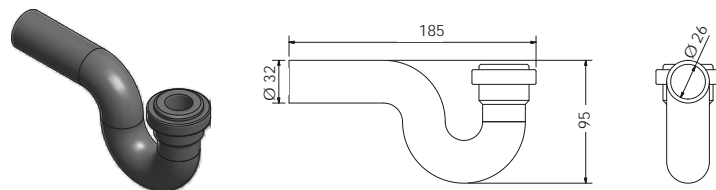


N.B. : predict 1 additional siphon if there is the cold water coil BA-AF / AC or DX gas (duct)

VERTICAL CONFIGURATIONS POSSIBLE VIEW FROM ABOVE

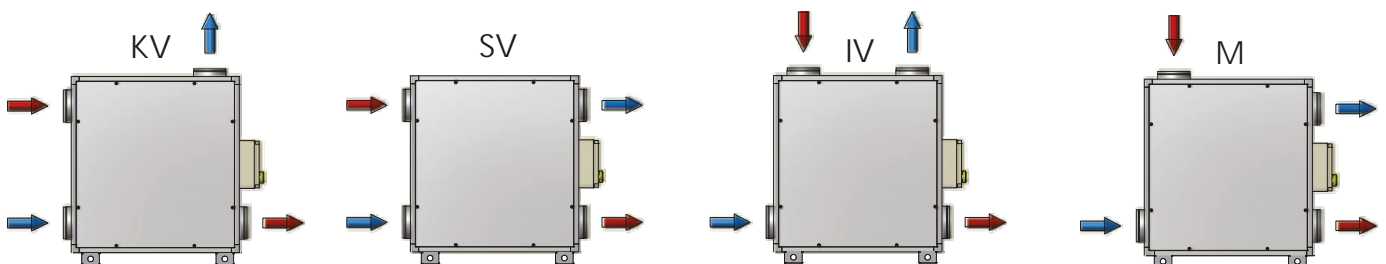



VERTICAL MIRRORED CONFIGURATIONS VIEW FROM ABOVE

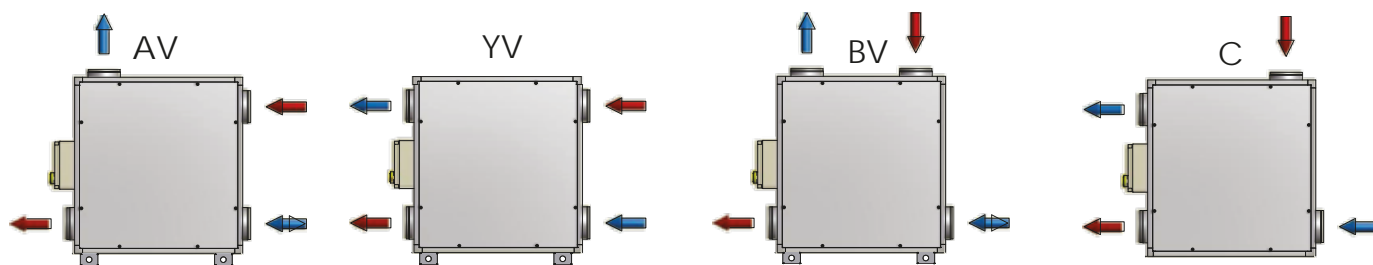

DX coil- DUO-EC 1

DIRECT EXPANSION COIL (R410A)						
Air flow [m³/h]	Tin [°C]	R.H. in [%]	Power [kW]	Tout [°C]	R.H. out [%]	Air pressure drop [Pa]
396	25	50	1,96	13,6	86	16
Ø connection[mm]	Fin pitch [mm]	N. Rows	Int.Vol.[dm³]	T evap [°C]	T cond [°C]	
22-16	3,0	3	1,0	5	50	

DX coil- DUO-EC 2

DIRECT EXPANSION COIL (R410A)						
Air flow [m³/h]	Tin [°C]	R.H. in [%]	Power [kW]	Tout [°C]	R.H. out [%]	Air pressure drop [Pa]
828	25	50	3,59	15,4	78,7	53
Ø connection[mm]	Fin pitch [mm]	N. Rows	Int.Vol.[dm³]	T evap [°C]	T cond [°C]	
18-12	2,5	3	1,1	5	50	


DX coil- DUO-EC 3

DIRECT EXPANSION COIL (R410A)						
Air flow [m³/h]	Tin [°C]	R.H. in [%]	Power [kW]	Tout [°C]	R.H. out [%]	Air pressure drop [Pa]
1260	25	50	6,18	14,1	83,6	50
Ø connection[mm]	Fin pitch [mm]	N. Rows	Int.Vol.[dm³]	T evap [°C]	T cond [°C]	
18-12	2,5	3	2,3	5	50	



CVR regulator

VARIABLE RESISTANCE SPEED REGULATOR

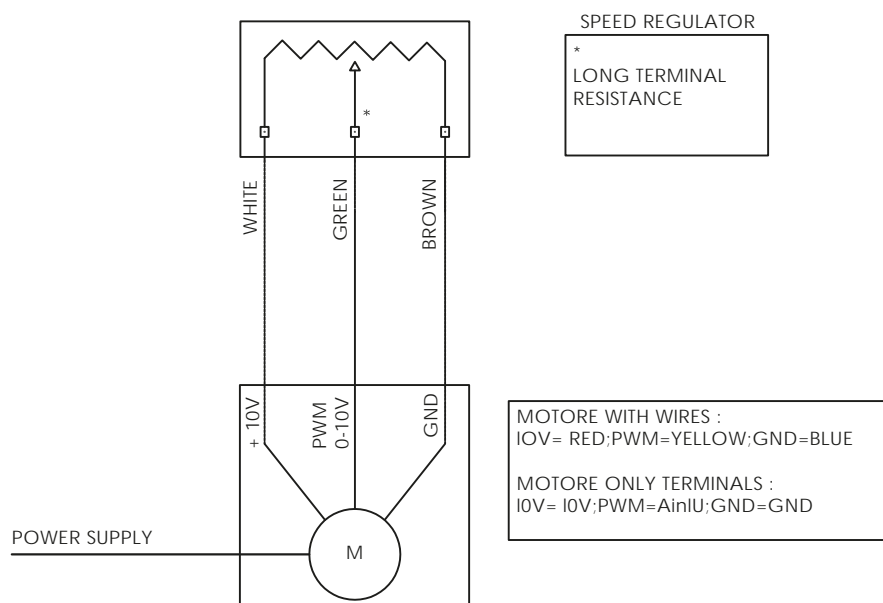

A	Manufacturer's name C.L.A srl			
B	Manufacturer's model identifier	DUO-EC 1 BP EVO-PH SH	DUO-EC 2 BP EVO-PH SH	DUO-EC 3 BP EVO-PH SH
C	Declared typology	UVNR / UVB		
D	Type of drive installed	Variable speed drive	Variable speed drive	Variable speed drive
E	Type of HPS	other	other	other
F	Thermal efficiency of heat recovery [%]	78,8	76,0	79,8
G	Nominal NRVU flow rate [m³/s]	0,11	0,23	0,35
H	Effective electric power input [kW]	0,17	0,34	0,92
I	SPFint W/[m³/s]	836	912	1206
J	Face velocity at design flow rate [m/s]	1,3	1,5	1,4
K	Nominal external pressure [Pa]	100	100	350
L	Internal pressure drop of ventilation components [Pa]	419	571	734
M	Optional: internal pressure drop of non-ventilation components	-	-	-
N	Static efficiency of fans used in accordance with Regulation (EU) No 327/2011 [%]	50,4	63,4	64,6
O	Declared maximum external leakage rate of the casing of ventilation units [%]	8,5	4,4	3,8
	Declared maximum internal leakage rate of bidirectional ventilation units or carry over (for regenerative heat exchangers only) [%]	6,5	1,5	5,3
P	Energy performance, preferably energy classification, of the filters (declared information about the calculated annual energy consumption	ePM1 55% (F7) ePM10 50% (M5)	ePM1 55% (F7) ePM10 50% (M5)	ePM1 55% (F7) ePM10 50% (M5)
Q	Position and description of visual filter warning for RVUs intended for use with filters, including text pointing out the importance of regular filter changes for performance and energy efficiency of the unit	Position and description of visual filter warning for RVUs intended for use with filters, including text pointing out the importance of regular filter changes for performance and energy efficiency of the unit		
R	Casing sound power level (LWA) [dB]	61	64	69
S	Internet address for pre-/dis-assembly instructions	www.utek.it		

Dear Customer

Thanks for your attention to the product UTEK , designed and manufactured to ensure the real values to the User : Quality, Safety and Savings on working.



Made in Italy

**AZIENDA CON SISTEMA
DI GESTIONE QUALITÀ
CERTIFICATO DA DNV GL**
ISO 9001

**AZIENDA CON
SISTEMA DI GESTIONE
AMBIENTALE CERTIFICATO
DA DNV**
ISO 14001



the Dealer

DUO-EC V_2020_3_EN



VENTILATION UNIT WITH HEAT RECOVERY FOR COMMERCIAL AND INDUSTRIAL BUILDINGS